


MESA

Access Mat

Features & Specifications

This innovative, high quality access mat will provide superior performance and value. It is ideally suited for the rental industry, longer term applications and can be shipped in a container.

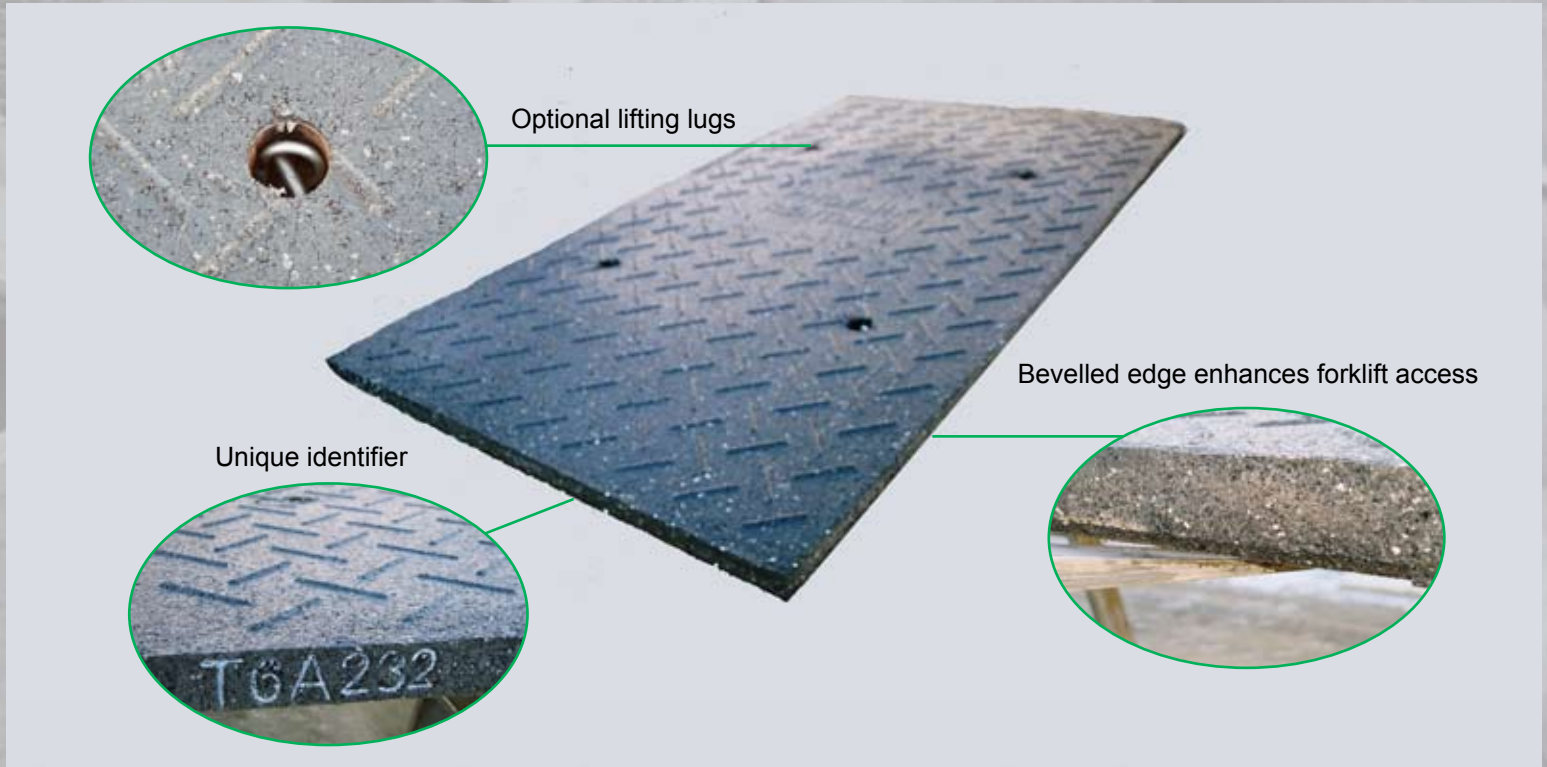

APPLICATIONS:

- A portable platform or roadway for construction projects and resource based activities including: drilling leases, staging areas, temporary shelter floors, pipeline crossings, helipads and more.
- Travel over soft or unstable terrain. Ground cover for ice bridges, natural terrain, vegetation etc.

SPECIFICATIONS:

Width: 2.13 m / 7 ft.
Length: 4.27 m / 14 ft.
Thickness: 8.89 cm / 3.5 in.
Weight: *1011 kgs / 2229 lbs - without lifting lugs
* 1023 kgs / 2256 lbs - with lifting lugs
*weights may vary

PATHWAY

MATS

www.pathwaymats.com


PATHWAY MATS INC.

Head Office

Nisku, Alberta, Canada
Tel: 780 955-8786
Fax: 780 955-8746
Toll Free: 1 866 955-8786

Regional Sales Office

Calgary, Alberta, Canada
Tel: 403 265-2005
Fax: 403 271-6311
Customer Service: 1 866 955-8786

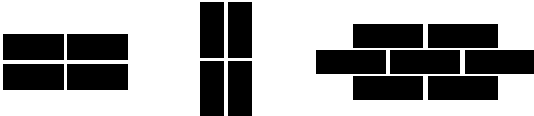Manufacture Process:	Recycled rubber tires are granulated and compressed in a mould at a high pressure to form the moulded product.						
Absorption Characteristics:	Resists most liquids including water, petroleum products and insects.						
Temperature Impact:	No adverse physical effect; stiffness will increase in colder temperatures.						
Abrasion Tolerance:	Resists abrasive traffic over a long time period.						
Rigidity:	Equipped with a patented, torsion system to increase rigidity and load distribution capabilities. This also provides a deflection memory enabling the mat to be re-straightened.						
Installation:	MESA mats are designed to be installed on solid to semi firm surfaces. Solid conditions must be within 12 inches of the laydown surface. Multiple layers of mats may be required in some circumstances. For best results, install mats on a semi smooth surface. Improper installation or usage may result in damage or reduced performance of the product.						
Installation options:							
Traffic Types:	Light to heavy vehicles						
Identification:	A unique identifier is embedded into each mat						
Lifting Lugs:	This optional feature has been destruction tested in excess of 10,000 psi. Excessive hoisting force may result in a safety concern and damage to the mat or lifting lug assembly.						
Safety Features:	<ul style="list-style-type: none">- Anti slip surface- Low puncture hazard- Resists fire- Low tripping hazard- Resists snow and ice build up- Low static electricity discharge						
Handling Options:	Forklift, grapple equipped excavator, picker or crane.						
Typical load sizes:	<table><tr><td>Payload 42,000 lbs</td><td>Mat Quantity - 18*</td></tr><tr><td>Payload 60,000 lbs</td><td>Mat Quantity - 26</td></tr><tr><td>Payload 80,000 lbs</td><td>Mat Quantity - 35 (*mats with lifting lugs)</td></tr></table>	Payload 42,000 lbs	Mat Quantity - 18*	Payload 60,000 lbs	Mat Quantity - 26	Payload 80,000 lbs	Mat Quantity - 35 (*mats with lifting lugs)
Payload 42,000 lbs	Mat Quantity - 18*						
Payload 60,000 lbs	Mat Quantity - 26						
Payload 80,000 lbs	Mat Quantity - 35 (*mats with lifting lugs)						