
PROTECTOR Access Mat

Features & Specifications

This durable, long lasting product provides a barrier to heavy equipment and abrasive traffic.





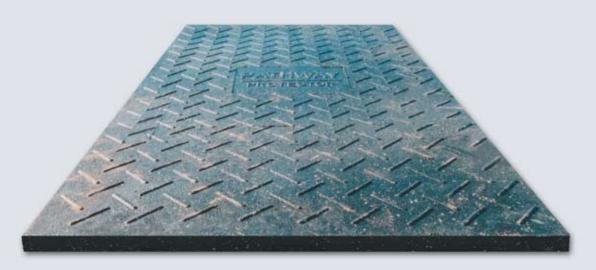

APPLICATIONS:

- Provide protection to bridge decks, building floors, and other structures from heavy equipment or abrasive traffic
- Provide a platform for helicopters
- Provide ground cover for ice bridges, natural terrain, vegetation etc.

SPECIFICATIONS:

Width: 2.43 m / 8 ft. Length: 4.26 m / 14 ft

Thickness: 8.89 cm / 3.5 in.

Weight: 1070 kgs / 2358 lbs - wet or dry

PATT-WAY MATS

Head Office

Nisku, Alberta, Canada Tel: 780 955-8786 Fax: 780 955-8746

Toll Free: 1 866 955-8786

PATHWAY MATS INC.

Regional Sales Office

Calgary, Alberta, Canada Tel: 403 265-2005 Fax: 403 271-6311

Customer Service: 1 866 955-8786

PROTECTOR

Access Mat

Manufacture Process: Recycled rubber tires are granulated and compressed in a

mould at a high pressure to form the moulded product.

Absorption Characteristics: Resists most liquids including water, petroeum products and

insects.

Temperature Impact: No adverse physical effect; stiffness will increase in colder

temperatures.

Abrasion Tolerance: Resists abrasive traffic over a long time period.

Rigidity: Non-re enforced, flexible mat.

Installation: PROTECTOR mats are designed to be installed on solid to

firm surface. Solid conditions must be within 3 inches of the laydown surface. For best results, install mats on a semi smooth surface. Improper installation or usage may result in

damage or reduced performance of the product.

Traffic Types: Light to heavy vehicles.

Identification: Unique identifier is embedded into each mat.

Liffing Lugs: This feature is not available.

Safety Features: - Low slippage surface

Low tripping hazardLow puncture hazard

- Resists snow and ice build up

- Resists fire

- Low static electricity discharge

Handling Options: Forklift, grapple equipped excavator, picker/crane.

Toll Free: 1 866 955-8786

Website: www.pathwaymats.com

