


TERRA FIRMA Access Mat

Features & Specifications

This innovative, high quality access mat will provide superior performance and value, is ideally suited for the rental industry and longer term applications.

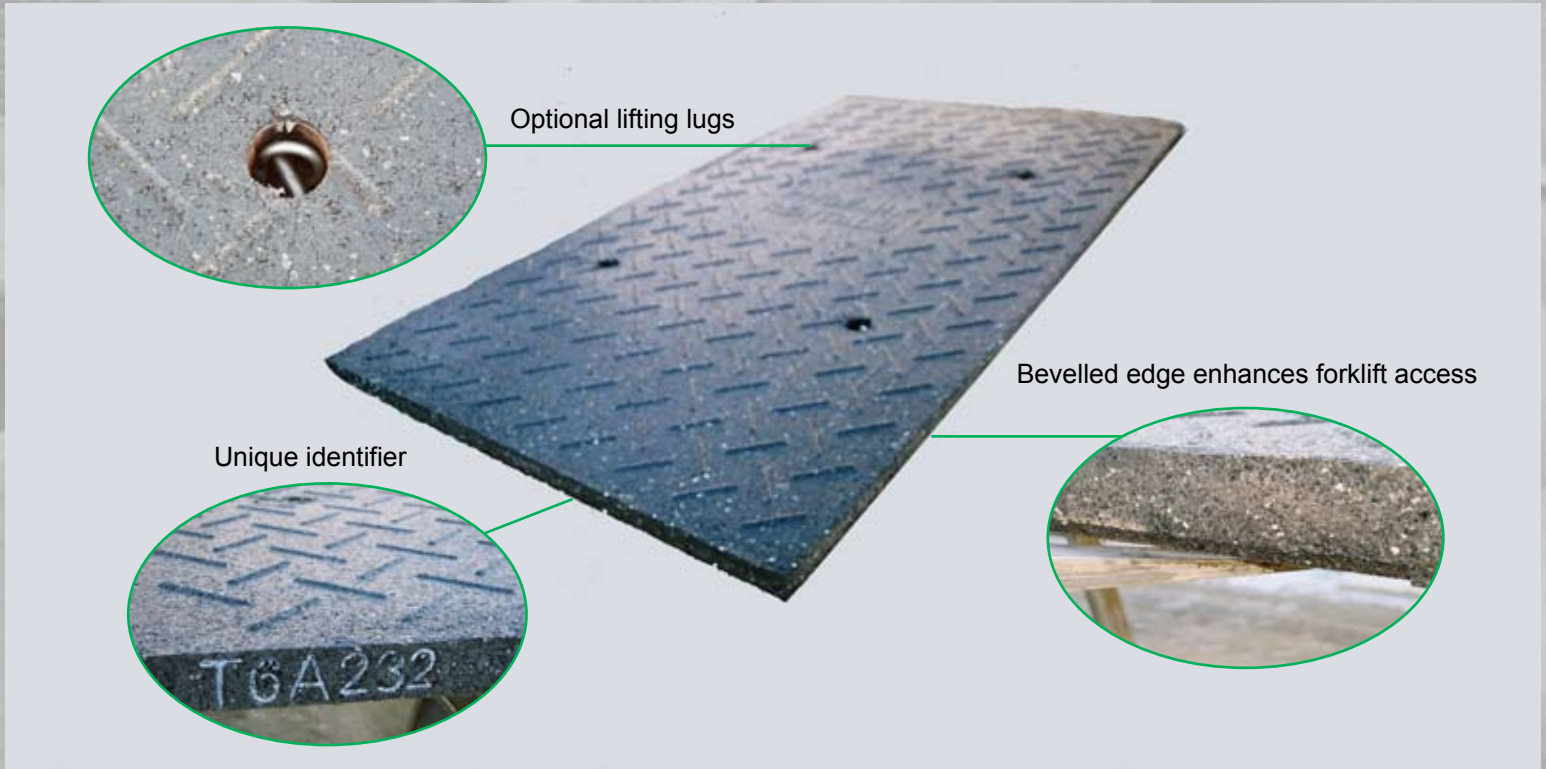

APPLICATIONS:

- Provide a portable platform resource based activities including: roadways, drilling pads and leases, staging areas, temporary shelter floors, pipeline crossings, helipads and more.
- Provide ground cover for ice bridges, natural terrain, vegetation etc.

SPECIFICATIONS:

Width: 2.43 m / 8 ft.

Length: 4.27 m / 14 ft.

Thickness: 8.89 cm / 3.5 in.

Weight: 1156 kgs / 2548 lbs - without lifting lugs
1170 kgs / 2579 lbs - with lifting lugs

PATHWAY MATS

www.pathwaymats.com

PATHWAY MATS INC.

Head Office

Nisku, Alberta, Canada

Tel: 780 955-8786

Fax: 780 955-8746

Toll Free: 1 866 955-8786

Regional Sales Office

Calgary, Alberta, Canada

Tel: 403 265-2005

Fax: 403 271-6311

Customer Service: 1 866 955-8786

Manufacture Process:	Recycled rubber tires are granulated and compressed in a mould at a high pressure to form the moulded product.	
Absorption Characteristics:	Resists most liquids including water, petroleum products and insects.	
Temperature Impact:	No adverse physical effect; stiffness will increase in colder temperatures.	
Abrasion Tolerance:	Resists abrasive traffic over a long time period.	
Rigidity:	Equipped with a patented, torsion system to increase rigidity and load distribution capabilities. This also provides a deflection memory enabling the mat to be re-straightened.	
Installation:	TERRA FIRMA mats are designed to be installed on solid to semi firm surfaces. Solid conditions must be within 12 inches of the laydown surface. Multiple layers of mats may be required in some circumstances. For best results, install mats on a semi smooth surface. Improper installation or usage may result in damage or reduced performance of the product.	
Traffic Types:	Light to heavy vehicles	
Identification:	A unique identifier is embedded into each mat	
Lifting Lugs:	This optional feature has been destruction tested in excess of 10,000 psi. Excessive hoisting force may result in a safety concern and damage to the mat or lifting lug assembly.	
Safety Features:	<ul style="list-style-type: none">- Low slippage surface- Low tripping hazard- Low puncture hazard- Resists snow and ice build up- Resists fire- Low static electricity discharge	
Handling Options:	Forklift, grapple equipped excavator, picker or crane.	
Typical load sizes:	Payload 42,000 lbs	Mat Quantity - 16*
	Payload 60,000 lbs	Mat Quantity - 23
	Payload 80,000 lbs	Mat Quantity - 33
		(*mats with lifting lugs)

Toll Free: 1 866 955-8786

Website: www.pathwaymats.com



PRINTED IN CANADA