


TUNDRA Access Mat

Features & Specifications

This innovative, high quality access mat will provide superior performance and value, is ideally suited for the rental industry and longer term applications.

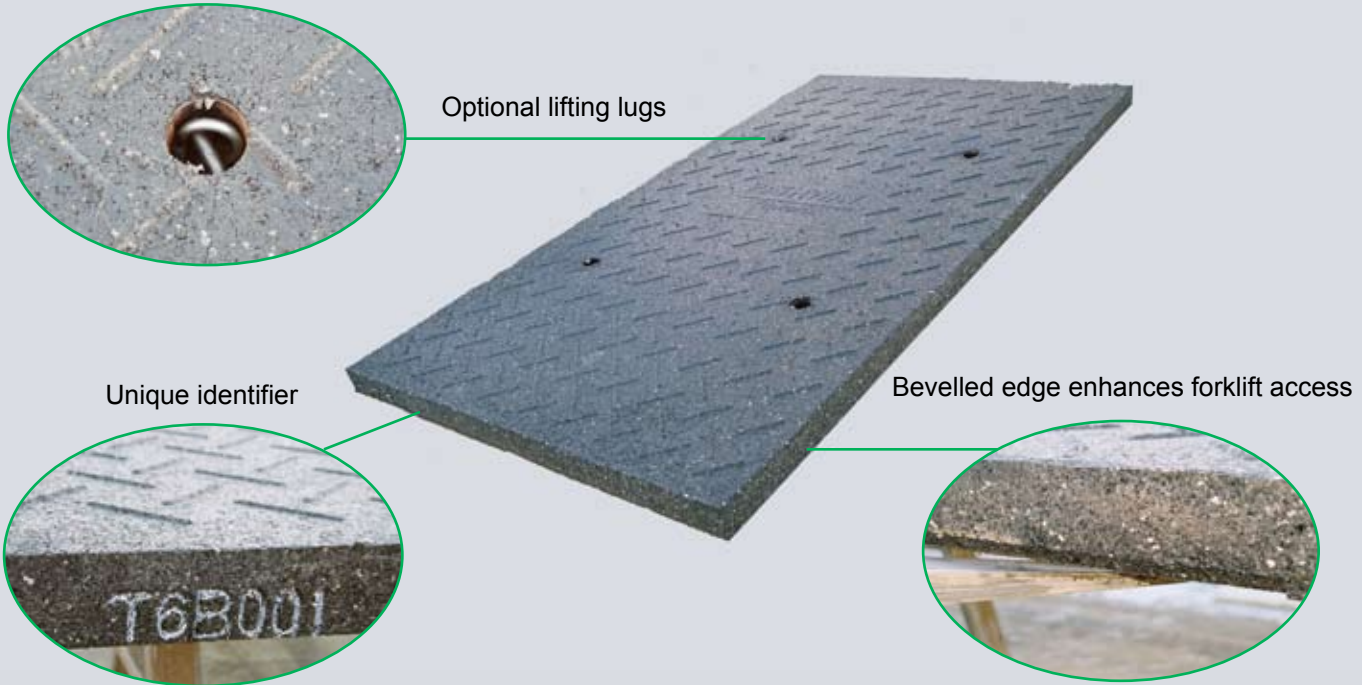

APPLICATIONS:

- Provide a portable platform to conduct resource based activities including: roadways, drilling pads and leases, staging areas, temporary shelter floors, pipeline crossings, helipads and more.
- Ground cover for natural terrain, vegetation etc.

SPECIFICATIONS:

Width: 2.43 m / 8 ft.

Length: 4.27 m / 14 ft.

Thickness: 13.97 cm / 5.5 in.

Weight: 1748 kgs / 3844 lbs - excludes lifting lugs

1770 kgs / 3894 lbs - includes lifting lugs

PATHWAY MATS

www.pathwaymats.com

PATHWAY MATS INC.

Head Office

Nisku, Alberta, Canada

Tel: 780 955-8786

Fax: 780 955-8746

Toll Free: 1 866 955-8786

Regional Sales Office

Calgary, Alberta, Canada

Tel: 403 265-2005

Fax: 403 271-6311

Customer Service: 1 866 955-8786

Manufacture Process:	Recycled rubber tires are granulated and compressed in a mould at a high pressure to form the moulded product.						
Absorption Characteristics:	Resists most liquids including water, petroleum products and insects.						
Temperature Impact:	No adverse physical effect; stiffness will increase in colder temperatures.						
Abrasion Tolerance:	Resists abrasive traffic over a long period of time.						
Rigidity:	Equipped with a patented, torsion system to increase rigidity and load distribution capabilities. This also provides a deflection memory enabling the mat to be re-straightened.						
Installation:	TUNDRA mats are designed to be installed on a solid to soft ground. Multiple layers of mats may be required in extremely soft conditions. For best results, install mats on a semi smooth surface. Improper installation or usage may result in damage or reduced performance of the product.						
Traffic Types:	Light to heavy vehicles.						
Identification:	A unique identifier is embedded into each mat.						
Lifting Lugs:	This optional feature has been destruction tested in excess of 10,000 psi. Excessive hoisting force may result in a safety concern and damage to the mat or lifting lug assembly.						
Safety Features:	<ul style="list-style-type: none">- Low slippage surface- Low tripping hazard- Low puncture hazard- Resists snow and ice build up- Resists fire- Low static electricity build up or discharge						
Handling Options:	Forklift, grapple equipped excavator, picker / crane.						
Typical load sizes:	<table><tr><td>Payload 42,000 lbs</td><td>Mat Quantity - 10*</td></tr><tr><td>Payload 60,000 lbs</td><td>Mat Quantity - 15</td></tr><tr><td>Payload 80,000 lbs</td><td>Mat Quantity - 20</td></tr></table> <p>*mats with lifting lugs</p>	Payload 42,000 lbs	Mat Quantity - 10*	Payload 60,000 lbs	Mat Quantity - 15	Payload 80,000 lbs	Mat Quantity - 20
Payload 42,000 lbs	Mat Quantity - 10*						
Payload 60,000 lbs	Mat Quantity - 15						
Payload 80,000 lbs	Mat Quantity - 20						